




FURROW RIDGER

DESCRIPTION

Worldtrac Furrow Ridger is the primary soil tillage equipment which is mounted and trailed from tractor's hydraulic unit and universal 3 point linkage system. As per crop it helps in making perfect ridge and also helps in uprooting unwanted roots and weeds.



FEATURES

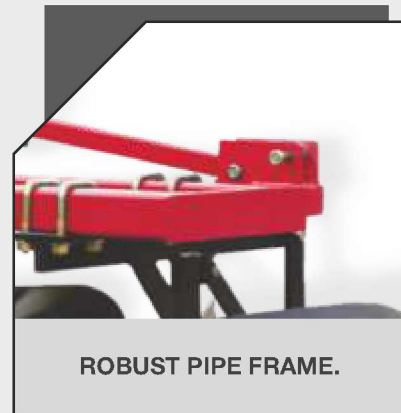

TECHNICAL SPECIFICATIONS

		Furrow Ridger			
		WT-FR3M	WT-FR3	WT-FR5	WT-FR7
	Model	WT-FR3M	WT-FR3	WT-FR5	WT-FR7
	Overall Length (mm)	890	940	940	1140
	Overall Width (mm)	1550	1830	3050	4300
	Overall Height (mm)	860	1200		
	Width of Cut	1380-1440	1620-1720	2750-2850	4000-4080
	No. of Bottoms	3	3	5	7
	No. of Ridges	2	2	4	6
	Power Required (HP)	26	35-45	50-60	90-110
	Operator Speed (km/h)	7-10			
	Weight (kg)	140	200	300	485

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

BENEFITS AND ADVANTAGES

- Available in 2 bottoms, 4 bottoms & 6 Bottoms to make one ridge, two ridges & three ridges respectively.
- It has heavy duty box type frame.
- High quality boron steel disc with 48-52 HRC hardness.
- Size and depth of the ridge can be adjusted.