



REVERSIBLE MOULD BOARD PLOUGH



DESCRIPTION

Worldtrac Reversible MB Plough is used to improve the soil air circulation. The roots can penetrate deeper into the soil, thus holding the plant firmly.

Ploughing of soil with Reversible MB Plough improves the water retaining capacity of the soil. This Improves soil aeration, enhanced water retention and uniform root penetration which ensures increased crop yield.



FEATURES

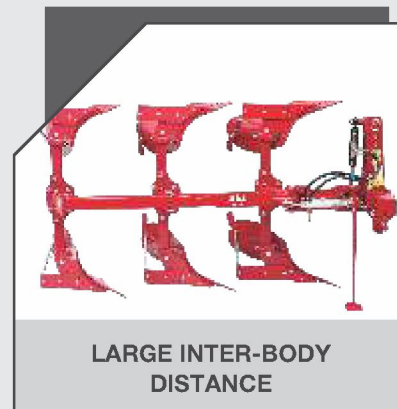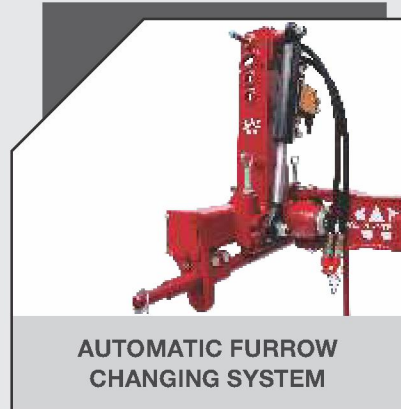

TECHNICAL SPECIFICATIONS

		Reversible Mould Board Plough - Light Series	
		WT-RP-02	WT-RP-03
	Model		
	Frame (mm)	90x90x7 (Sq. Tubular Frame)	90x90x7 (Sq. Tubular Frame)
	No. of Furrow	2	3
	Turnover Mechanism	Hydraulic	
	Tyne (mm)	25 (Boron Steel) (Profile Cut Single Piece)	
	Working Width (mm)	610	915
	Mould Board (mm)	8	
	Plough Share (mm)	15	
	Weight (Kg. Approx.)	440	560
	Tractor Power (HP)	60-75	75-90

		Reversible Mould Board Plough - Heavy Duty Series		
		WTRPH-02	WTRPH-03	WTRPH-04
	Model			
	Overall Length (mm)	2300	3145	3990
	Overall Width (mm)	1180	1360	1675
	Overall Height (mm)	1555		1555
	Working Width (mm)	650-660	990-1000	1300-1310
	Working Depth (mm)	200-250		
	No of Furrow	2+2	3+3	4+4
	Power Required (HP)	60-75	75-90	90-100
	Frame	CAT-II		
	3 Point Hitch	Square Box		
	Approx Weight (kg) (Excluding Tyre)	490	730	870
	Tyre Type	16.6.50.8 Tracking Tyre		
	Tyre Overall Dia (mm)	406		
	Tyre Section Width (mm)	170		
	Tyre Assembly weight (kg)	80		

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

BENEFITS AND ADVANTAGES

- ⦿ Automatic furrow changing system which ensures complete inversion of soil.
- ⦿ Strong Turnover axle in the head stock can withstand the highest impact and permanent loads.
- ⦿ Large inter-body distance and turnover clearance to prevent clogging.
- ⦿ Height adjustable drawbar makes it easy while working in any kind of soil condition