




# MOUNTED OFFSET DISC HARROW

## DESCRIPTION

In Worldtrac Mounted offset disc harrow discs are offset so that they are not parallel with the overall direction of implement. This arrangement ensures that the discs will repeatedly slice any ground to which they are applied, in order to optimize the result. The concavity of the discs as well as their offset angle causes them to loosen and lift the soil that they cut.



## FEATURES

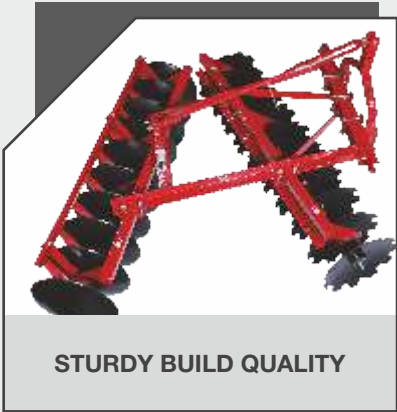

# TECHNICAL SPECIFICATIONS

	Mounted Offset Disc harrow					
Model	WT-DH-10M	WT-DH-14	WT-DH-16	WT-DH-18	WT-DH-20	WT-DH-24
No Of Disc	10	14	16	18	20	24
Type Of Disc	Front Notched & Rear Plain					
Disc Diameter (mm / Inch)	455 / 18	560 / 22				
Disc Spacing (mm / Inch)	225 / 8.86	228 / 8.98				
Working Width (mm / Inch)	1065-1070 / 41.9-42.1	1590-1640 / 62.2-64.6	1800-1860 / 70.9-73.2	2020-2070 / 79.5-81.5	2240-2290 / 88.2-90.2	2670-2720 / 105.1- 107.1
Bearing Hubs	4	4	6	8	8	8
Gang Rod (mm / inch)	28x28 / 1.1x1.1 (Sq. Rod)	32x32 / 1.26x1.26 (Sq. Rod)				
Mounted	CAT-I	CAT-II				
Weight (Kg. / lbs Approx.)	210 / 463	432 / 952	505 / 1113	578 / 1274	617 / 1360	728 / 1605
Tractor Power (HP)	20-26	35-45	45-55	60-65	65-75	75-90

\*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

## BENEFITS AND ADVANTAGES

- ⦿ Disc are tempered and made of high quality Boron steel
- ⦿ Adjustable Depth rod defines depth for working and transport
- ⦿ Working angles can be easily adjusted with holes provided on various positions
- ⦿ Heavy Duty frame with strong Bolt Gang lock
- ⦿ Ideal tillage depth is 80-110 mm
- ⦿ Notched discs in the front first break the hard pan of soil followed by plain discs which cut, loosen and lift the soil easily.