




LAND LEVELER

DESCRIPTION

Worldtrac Land Leveler results in optimum utilization of water, high speed working and reduction in weeding cost. This can level the field with tractor mounting and reduce the work in crop establishment.



FEATURES

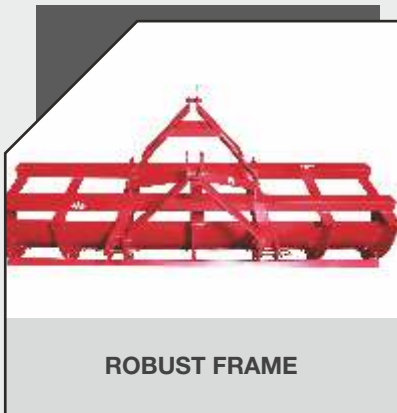

TECHNICAL SPECIFICATIONS

	Land Leveler			
Model	WT-LL7	WT-LL8	WT-LL9	WT-LL10
Overall Length (mm / Inch)	970 / 38.2			
Overall Width (mm / Inch)	2165 / 85.2	2465 / 97	2770 / 109	3075 / 121.1
Overall Height (mm / Inch)	1210 / 47.6			
3 Point Linkage Cat.	Cat II			
Working Width (mm / Inch)	2140 / 84.2	2440 / 96.1	2745 / 108.1	3050 / 120.1
Tractor Power (HP)	35-40	45-55	60-75	75-90
Weight (Kg. Approx.)	240 / 529	270 / 595	295 / 650	330 / 727

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

BENEFITS AND ADVANTAGES

- ⦿ The robust frame, various supports like Centre support, rear support of leveler chassis, thicker plate creates a strong machine designed to work on the difficult soil conditions
- ⦿ High carbon steel reversible blade ensures longevity and maximum performance
- ⦿ Easy to operate machine allows operator to work back and forth which helps in filling corners of field efficiently
- ⦿ Heavy duty bucket ensures uniform levelling.
- ⦿ Both the sides are equipped with SOIL HOLDING ARMS to carry the soil perfectly till end without spillage.