



ROUND BALER

DESCRIPTION


The worldtrac round baler is the perfect equipment that compresses the cut and raked crops, including salt marsh hay, cotton, hay, flax, and straw, turns them into compact bales making it easy in handling, storing & transporting.



FEATURES



EFFICIENT PICK UP SYSTEM

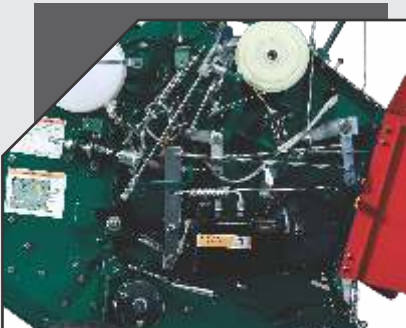

HIGH QUALITY CHAINS AND BEARINGS



HEAVY DUTY GEARBOX



INTEGRATED HYDRAULIC SYSTEM



ROBUST DRIVE CHAINS AND PIVOT BUSHES



AUTO LUBRICATION SYSTEM



GRADE 3 SPRING STEEL FOR REEL TINES












6-PLY TUBELESS TYRES



SAFETY SLIP CLUTCH

TECHNICAL SPECIFICATIONS

		Round Baler				
	Model	WT-RB-0.8	WT-RB-1.15 -EW	WT-RB-0.8J	WT-RB-1.03J	WT-RB-1.15J
	Working Width (cm / Inch)	80 / 31.5	115 / 45.3	80 / 31.5	103 / 40.5	115 / 45.3
	Bale Chamber (cm / Inch)	70 / 27.6	105 / 41.3	70 / 27.6	93 / 36.6	105 / 41.3
	Bale Length (cm / Inch)	70 / 27.6	105 / 41.3	70 / 27.6	93 / 36.6	105 / 41.3
	Bale Diameter (cm / Inch)	50 / 19.7	50 / 19.7	60 / 23.6	60 / 23.6	60 / 23.6
	Bale Weight (kg / lbs)	14-17 / 31-37.5	18-22 / 40-48.5	24-28 / 60-62	28-32 / 62-70.5	32-36 / 70.5-79
	Binding Twine	Jute Twine / PP				
	No. of Rollers	10	10	12	12	12
	Bale Ejection	Manual / Automatic (Optional)				
	Lubrication	Central oil lubricating system for chains				
	Efficiency (Bales per hour)	60-80		40-60		
	Tractor Forward Speed (km/hr // miles/hr)	2-5 / 1.2-3.1				
	Tractor Power (HP)	25-60				
	PTO RPM	540				
	Dimension (LxWxH) (cm / Inch)	125x148x116 49.2x58.3x45.8	125x180x116 49.2x70.9x45.6	140x148x132 55.1x58.3x52	140x169x132 55.1x66.5x52	140x180x132 55.1x70.9x52
	Approx Weight (Kg / lbs)	465 / 1025	553 / 1219	515 / 1135	580 / 1279	620 / 1367
	Tyre Size	16 x 6.50 - 6 ply -Tubeless				
	Drive Protection	Shear Bolt on Machine. Slip clutch in pickup reel				

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

BENEFITS AND ADVANTAGES

- ⦿ The guide wheels helps in maintaining the same line as per reel tines leading to accurate pickup.
- ⦿ The rotor design encourages a uniform crop flow, which reduces the risk of blockages, thus maximizing output.
- ⦿ Accurate height control can be achieved through a spring balanced hydraulic lifting system.
- ⦿ Automatic greasing system with each bale coming out of machine leading to better operation.
- ⦿ Safety slip clutch for drive overload protection.