




SEED CUM FERTILIZER DRILL

DESCRIPTION


Worldtrac seed drill is used in placing the seeds in continuous flow in furrows with a uniform rate and desired depth. The equipment is used for sowing crops such as pulses, barley, wheat, Sorghum, etc. There are two types of machines in the category which come with a side wheel driving & central wheel driving mechanism.



FEATURES

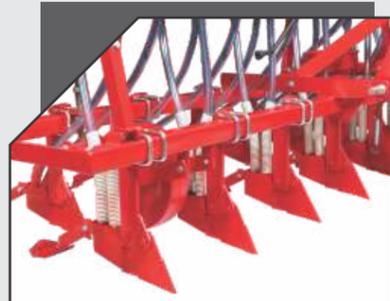

SUPERIOR QUALITY FURROW OPENER SHOVELS

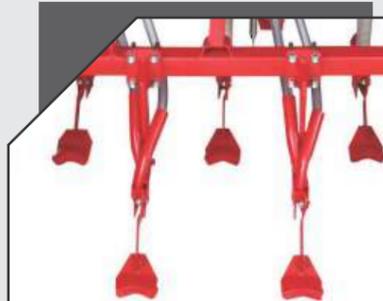

FISH TAIL SEED COVERING UNIT



GRAIN FLOW CONTROL LEVER



DURABLE DEPTH CONTROL WHEEL



FLUTED ROLLER SEED METERING UNIT

TECHNICAL SPECIFICATIONS

	Seed Cum Fertilizer Drill				
	WT-SFD9-HD	WT-SFD11-HD	WT-SFD13-HD	WT-SFD15-HD	WT-SFD17-HD
i Model	WT-SFD9-HD	WT-SFD11-HD	WT-SFD13-HD	WT-SFD15-HD	WT-SFD17-HD
No. of Rows	9	11	13	15	17
Tractor Power (HP)	30-40	40-45	45-50	55-60	60-65
Seed Metering	Fluted Roller Fertilizer Metering Agitator & Sliding Orifice				
Type & Hitching	Tractor mounted with 3 Point Linkage Frame Strong and Robust				
Three Point Linkage	CAT II				
Seed Tank Capacity(Kg)	40	50	60	70	80
Row to Row distance(mm)	177				
Fertilizer Tank Capacity(Kg)	40	50	60	70	80
Working Width(mm)	1600	1955	2311	2667	3022
No. of Seed & Fertilizer Distribution pipes	9+9	11+11	13+13	15+15	17+17
Dimension of Machine(mm)	1828x1016x1143	2184x1016x1143	2438x1016x1143	2870x1016x1143	3251x1016x1143
Weight (kg)	245	290	330	365	410

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

BENEFITS AND ADVANTAGES

- ⊙ Superior Quality Furrow Opener Shovels gives long wear resistance life
- ⊙ Tines fitted with U Clamps for easy adjustments along with strong grip
- ⊙ Flow control Lever mechanism helps to adjust Seed and Fertilizer Rate
- ⊙ Depth control wheel ensure higher Yields and better seed placement. Gun metal bush in wheels gives long wear resistant life.
- ⊙ Best in class seed metering mechanism.