



# DOUBLE SPRING LOADED SERIES

## DESCRIPTION

Worldtrac Dual spring loaded Cultivator is designed for toughest tillage operations.


It loosens and aerates the soil to a depth of upto nine inches. Spring loaded Cultivator is designed for all types of root crop and for general cultivation work. It helps in preparing the seed bed quickly and economically.



## FEATURES




HEAVY DUTY ANGLE

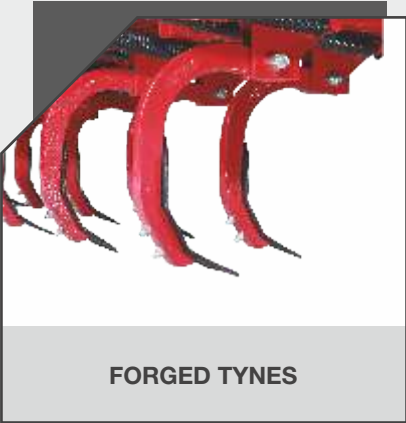


FORGED TYNES



REVERSIBLE SHOVEL

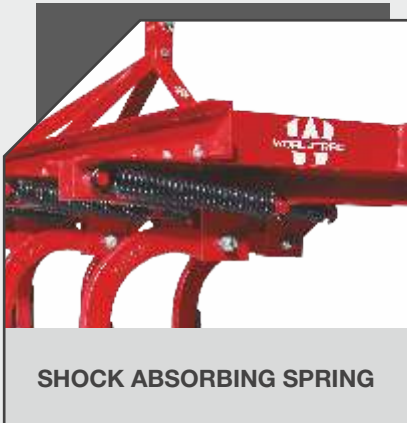



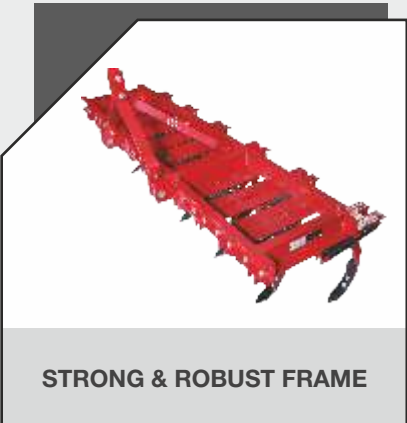






SHOCK ABSORBING SPRING



STRONG & ROBUST FRAME

# TECHNICAL SPECIFICATIONS

	Double Spring Loaded Series										
 Model	WT-CL -MS5	WT-CL -MS7	WT-CL -M9	WT-CL -M11	WT-CL -MH9	WT-CL -MH11	WT-CL -MH13	WT-CL -MH15	WT-CL -HF15	WT-CL -HF17	
 Spring (mm // Inch)	9.5 WD / 44 OD/27 Coil // 0.37 WD / 1.73 OD/27 Coil		9.2 WD / 48 OD/27 Coil // 0.36 WD / 1.9 OD/27 Coil		10 WD / 50 OD / 28.5 Coil // 0.39 WD / 1.97 OD/ 28.5 Coil						
 Tyne (mm / Inch)	22×19 / 0.86 x 0.75 (Forged)		25×19 / 0.98 x 0.75 (Forged)		50×25 / 1.97 x 0.98 (Forged)						
 Shovels (mm / Inch )	8(EN-45) / 0.3										
 Width (mm / Inch)	1205 / 47.4	1640 / 64.5	2134 / 84	2590 / 102	2039 / 80.3	2492 / 98.1	2945 / 115	3520 / 138.6	3520 / 138.6	3970 / 156.3	
 Length (mm / Inch)	834 / 32.8		698 / 27.5		878 / 34.6			915 / 36			
 Height (mm / Inch)	930 / 36.6		533 / 21		1157 / 45.5			1170 / 46.1			
 Weight (Kg./ lbs Approx.)	140 / 309	170 / 375	180 / 397	220 / 485	290 / 639	370 / 816	440 / 970	520 / 1146	540 / 1190	650 / 1433	
 Tractor Power (HP)	20-24	26-30	45+	50+	45+	55+	65+	75+	75+	90+	

\*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

## BENEFITS AND ADVANTAGES

- ⦿ Spring Loaded Tine Assemblies derive their strength from heavy duty angles, which once fixed to the immensely strong main frame cannot move out of position.
- ⦿ Forged tynes are equipped with high tensile strength and is of superior quality
- ⦿ High quality reversible steel shovels.
- ⦿ Shock absorbing spring helps as one tine strikes a buried object, the others continue to work at the correct depth
- ⦿ Strong and robust frame designed for breaking up hard land and mixing crop residue.